

A DEMONSTRATIVE PROTOTYPE OF AERONAUTICAL DUAL-POWER PATH GEAR UNIT

Grzegorz Budzik, Mariusz Sobolak, Bogdan Kozik, Bartłomiej Sobolewski

Rzeszow University of Technology
Faculty of Mechanical Engineering and Aeronautic
Powstańców Warszawy Av. 8, 35-959 Rzeszow, Poland
e-mail: gbudzik@prz.edu.pl, msobolak@prz.edu.pl, bogkozik@prz.edu.pl

Abstract

The paper presents a process of designing, modelling and manufacturing of a demonstrative prototype of a dual-power path gear unit to be applied in aeronautical systems of drive transmission. The process of making a demonstrator of a dual-power path gear unit by means of 3D-CAD modelling and Rapid Prototyping has been described here.

Designing gears is based on Computer Aided Design (CAD), Computer Aided Engineering (CAE), Computer Aided Manufacturing (CAM) systems including also Rapid Prototyping (RP).

The first stage of the designing process of a gear unit is always defining basic parameters of gear work (among others; power, rotational speed, transmission ratio) depending on the unit's predestination. On the basis of the above, the calculation of main constructional parameters is carried out. Subsequently, it is possible to make 3D-CAD models of toothed wheels and the remaining parts of the gear unit. In case of designing demonstrative prototypes, it is important to take into consideration the assumptions of modelling similarity to a real gear unit. 3D-CAD systems are often equipped with modules for analysing geometrical parameters and cooperation of individual parts of the unit for example the area of contact. A detailed analysis of cooperation of gear parts of the unit allows for detecting models' faults early and for deleting them.

After making 3D-CAD models one can approach to creating a prototype by means of Rapid Prototyping methods. It is necessary to prepare the numerical data essential as a subsequent stage of the process of making the demonstrator. On that basis the individual parts of the gear unit are made in an incremental process. The accuracy of creating a physical prototype depends mainly on the accuracy of a 3D-CAD/3D-RP model prepared in a process of processing numerical data.

A demonstrator described in the paper has been made by means of FDM method. The prototype allowed for analysing constructional solutions of gear units on a physical model and for preparing assumptions for introductory stand tests.

Keywords: aeronautical gears, toothed wheels, aeronautical power drives

1. Introduction

A dual-power path gear is one of many multi-power solutions of transmitting power where two paths are used in order to split the transmitted power. In a classic multi-phase toothed gear, one gearing transmits the whole power on every phase. In an analogous dual-power path gear, two gearings are found on every phase and they transmit the required power. That is why modules of these wheels are smaller and the gear size is comparable to a traditional one. In case of a dual-power path gear it is also possible to obtain lower weight in comparison to a traditional gear which is especially important in aeronautical gear units [1-3, 7, 9]. A prototype of the described in the paper dual-power path gear (the assumed ratio of 12) has been made according to a diagram presented in Fig. 1.

In order to diminish size of the dual-power path gear it was assumed that axis of its shafts are not placed at one plane. As a result of analyzing introductory solutions of kinematic structure of dual-power path gears, a layout of individual elements of the gear has been determined in accordance with a diagram (Fig. 2). As can be seen, an input shaft I and an output shaft III are not coaxial.

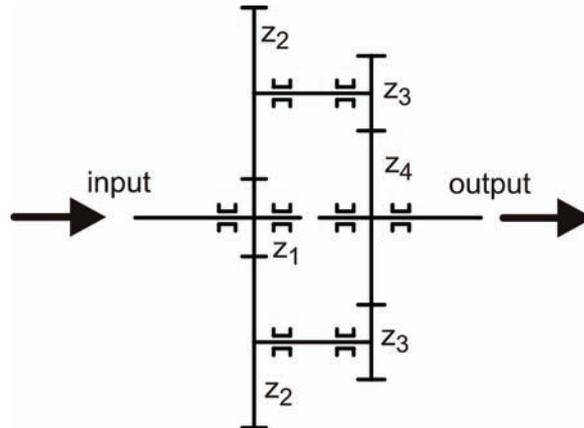


Fig. 1. A diagram of power transmission in a dual-power path gear

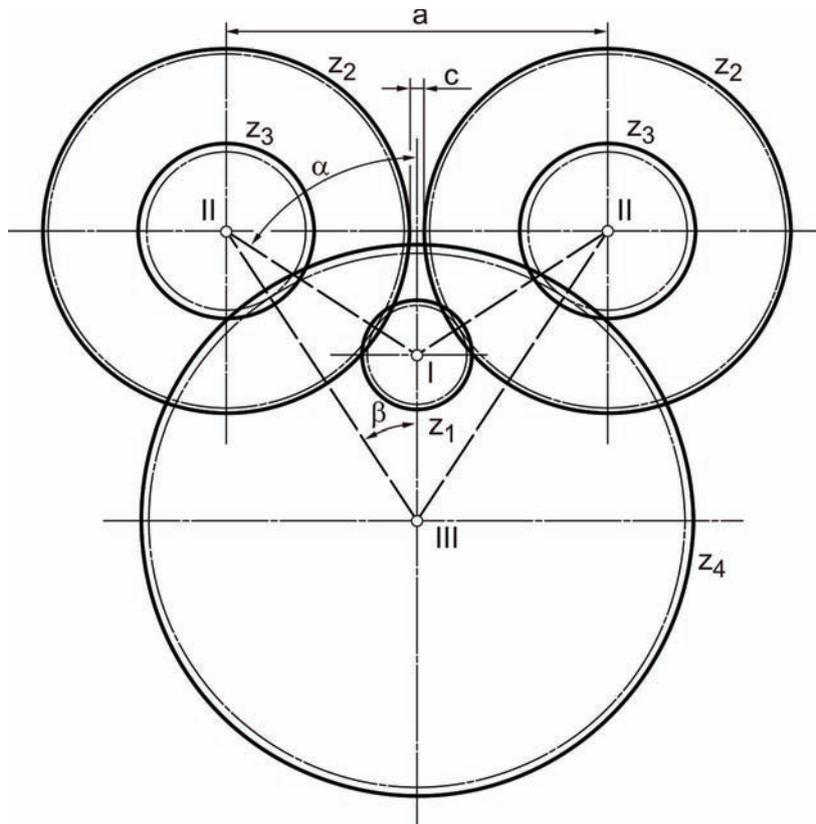


Fig.2. A diagram of wheel arrangement in a dual-power path gear – front view

2. Calculations for a dual-power path gear

Kinematic assumption data for cooperating wheels is extremely vital in case of a dual- power path gear. To ensure steady operation of wheels, gearings working at a given phase should simultaneously be at the same phase (at an identical arrangement of pinion teeth and wheel teeth in respect to one another). To assure this, the value of α angle should equal:

$$\alpha = i \cdot \frac{180}{z_1}, \quad (1)$$

where:

i - an integer,

z_1 - a number of teeth in wheel no. 1.

β angle should analogically equal:

$$\beta = j \cdot \frac{180}{z_4}, \quad (2)$$

where:

j - an integer,

z_4 - a number of teeth in wheel nr 4.

Assuming minimal anti-collision backlash between wheels c one can determine minimal values of angles α and β :

$$a_{\min} = \arcsin\left(\frac{m_I(z_2 + 2) + c}{m_I(z_1 + z_2)}\right), \quad (3)$$

$$\beta_{\min} = \arcsin\left(\frac{m_{II}(z_3 + 2) + c}{m_{II}(z_3 + z_4)}\right), \quad (4)$$

where:

m_I - module of wheels of gearing I,

m_{II} - module of wheels of gearing II,

z_2 - a number of teeth in wheel nr 3,

z_3 - a number of teeth in wheel nr 4.

Preliminarily, while calculating one assumes α angle on the basis of (1) and (3) and then assuming that:

$$\frac{m_I(z_1 + z_2)}{2} \sin(\alpha) = \frac{a}{2}, \quad (5)$$

$$\frac{m_{II}(z_3 + z_4)}{2} \sin(\beta) = \frac{a}{2} \quad (6)$$

and comparing sides:

$$\frac{m_I(z_1 + z_2)}{2} \sin(\alpha) = \frac{m_{II}(z_3 + z_4)}{2} \sin(\beta), \quad (7)$$

one can determine β angle:

$$\beta = \arcsin\left(\frac{m_I(z_1 + z_2)}{m_{II}(z_3 + z_4)} \sin(\alpha)\right). \quad (8)$$

However β angle must comply with condition (2), therefore it is necessary to assume an angle closest to the determined one and complying with conditions (2) and (4). That is why a correction of tothing is necessary in most cases.

Wheels z_2 and z_3 should be situated in respect to each other so that between wheels there is an angle which is a result of subtraction $\alpha - \beta$. One should not make a correction of angle of mutual settlement of wheels instead of correction of tothing because it leads to uneven transmission of load by the two paths.

Resistance calculations of wheels of the designed gear have been carried out on the basis of guidelines for gears assuming that each gearing transmits maximum 65% of load [6].

3. A 3D-CAD model of a dual-power path gear

The carried out calculations of dual-power path gear make it possible to design it in 3D-CAD environment. Contemporary CAD/CAM/CAE/CP systems assist the process efficiently. INVENTOR system has been used for the research. It allows to make geometrical prototypes and to carry out many introductory tests and analysis confirming the designing assumptions or influencing their modification [1, 8].

Models of toothed wheels have been made on the basis of tooth profiles generated by means of copyright computer programs developed in accordance with INVENTOR environment.

As a result of modelling individual parts of the gear and selection of normalized parts taken from a program library, a three-dimensional numerical prototype of a dual-power path gear has been made (Fig. 3).

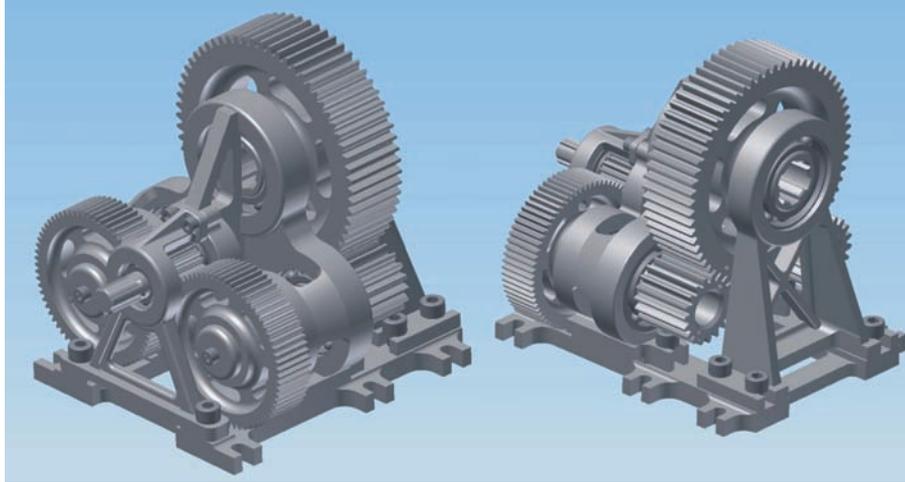


Fig. 3. A 3D-CAD model of dual-power path gear

An additional task of the 3D-CAD model is checking correctness of construction and operation of the gear in defined conditions. In case of the discussed gear it is also checking the division of power into two paths. CAE programming modules, which are helpful on the stage of analysis, can be applied here. CAD software makes it possible to generate data for computational programs using finite elements method.

4. A demonstrative-research prototype of a dual-power path gear

The basis for making a research prototype was 3D-CAD models recorded in STL format. STL models subjected to program processing – division into layers 0,254mm thick applying CatalystEX program attending FDM machines – Staratasy U-Print machine (Fig. 4). In this program the models were placed on a plane of working platform of the device.

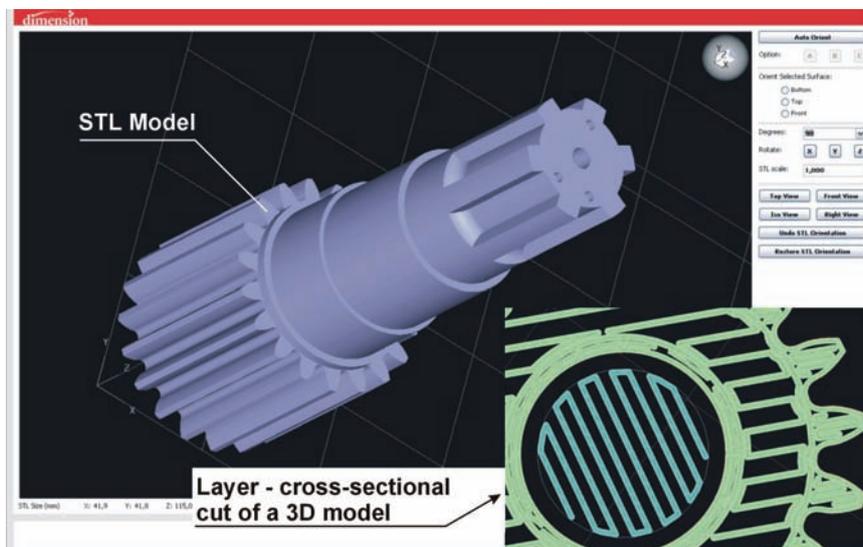


Fig. 4. A 3D-STL model of gear while processing by CatalystEX program

Individual parts of a prototype – toothed wheels and trunk were made using U-Print device and the material used was ABS. Normalized parts – rolling bearings and combining bolts were also used for creating the demonstrator. A ready for tests prototype was obtained after assembling all the parts (Fig. 5).

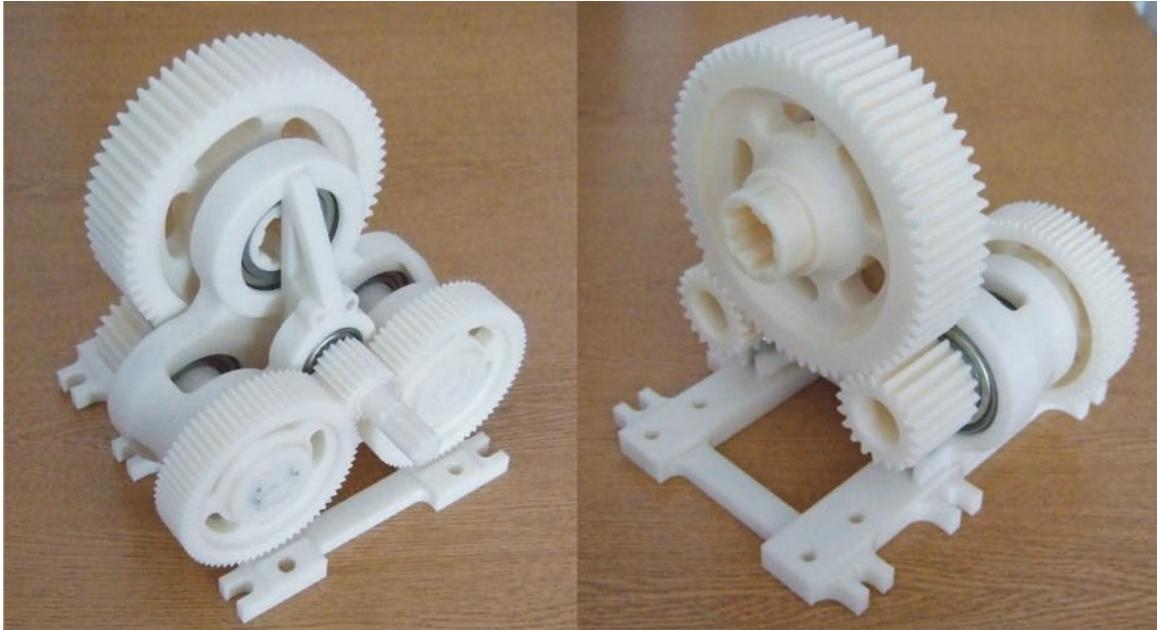


Fig. 5. A prototype – a demonstrator of a dual-power path gear

5. Conclusion

Computer Aided Design (CAD) and Computer Aided Engineering (CAE) together with Rapid Prototyping technologies make it possible to create demonstrative and research prototypes of aeronautical gears [5, 8] quickly and therefore cheaply.

The research prototype studied in this paper was made by means of FDM method and the material used was ABS. Qualities of ABS and a way of creating layers of the model allow for using the model for stand tests. Introductory tests on models of this kind made it possible to carry out an analysis determining correctness of the applied designing methodology and constructional solutions of aeronautical dual-power path gear. The prototype is meant for tests determining power division.

The tests will be carried out on a test stand. They will allow for verifying an assumption that division of power is equable in case of geometrical synchronization of gearing cooperation on a given phase of gear.

The following stage of the research will be making a gear prototype of a material having qualities similar to target ones and subsequently carrying out tests in conditions of real loading.

Acknowledgement

Financial support of Structural Funds in the Operational Programme - Innovative Economy (IE OP) financed from the European Regional Development Fund - Project “Modern material technologies in aerospace industry”, No POIG.0101.02-00-015/08 is gratefully acknowledged.

References

- [1] Budzik, G., Kozik, B., Pacana, J., Źmuda, B., *Modelling and prototyping of aeronautical planetary gear demonstrator*, Journal of KONES Powertrain and Transport, Vol. 17, No. 3, pp. 49-54, 2010.

- [2] Cocking, H., *The Design of an Advanced Engineering Gearbox*, Vertica, Westland Helicopters and Hovercraft PLC, Vol. 10, No. 2, pp. 213–215, Yeovil, England 1986.
- [3] Krantz, T. L., Delgado, I. R., *Experimental Study of Split-Path Transmission Load Sharing*, NASA Technical Memorandum 107202, Army Research Laboratory, Technical Report ARL–TR–1067, San Diego, California 1996.
- [4] Liou, W., *Rapid Prototyping and engineering applications – a toolbox for prototype development*, Taylor & Francis Group, 2008.
- [5] Oleksy, M., Budzik, G., Heneczkowski, M., *Hybrid polymer composites for rapid prototyping of gears*, Polimery, 55, 5, pp. 403-407, 2010.
- [6] Pacana, J., Kozik, B., Budzik, G., *Defining instantaneous contact track of aeronautical bevel gear applying finite elements method and rapid prototyping method*, Journal of KONES Powertrain and Transport, Vol. 17, No. 2. pp. 379-386., 2010
- [7] Smirnov, G., *Multiple-Power-Path Nonplanetary Main Gearbox of the Mi-26 Heavy-Lift Transport Helicopter*, Vertiflite, Mil Design Bureau, Vol. 36, pp. 20–23, Moscow 1990.
- [8] Sobolak, M., Budzik, G., *Experimental Method of Tooth Contact Analysis (TCA) With Rapid Prototyping (RP) Use*, Rapid Prototyping Journal, Vol. 14, No. 4, pp. 197-201, 2008.
- [9] White, G., *New Family of High-Ratio Reduction Gear With Multiple Drive Paths*, Proc. Instn. Mech. Engrs., Vol. 188, pp. 281-288, 1974.